

BASTRAMAT TF Smoke Technology



- Model 851 TF
- Model 1201 TF
- Model 1501 TF
- Model 2001 TF

with wood chip smoke generator built into door



Fig. Modell BASTRAMAT 851 TF




BASTRAMAT TF Smoke Technology

Overview of models

| BASTRAMAT | | 851 TF | | 1201 TF | | 1501 TF | | | 2001 TF | | | |
|---|------|----------|----------|----------------------|---------|----------|----------------------|----------|----------|----------------------|---------|----------------------|
| | | Electric | Electric | LP steam Electric | Gas/Oil | Electric | LP steam Electric | Gas/Oil | Electric | LP steam Electric | Gas/Oil | LP steam HP steam |
| Effective volume | ltr | 1000 | 1700 | 1700 | 1700 | 2200 | 2200 | 2200 | 3000 | 3000 | 3000 | 3000 |
| Capacity depending on calibre and type of goods | kg | 45-150 | 60-220 | 60-220 | 60-220 | 80-300 | 80-300 | 80-300 | 110-400 | 110-400 | 110-400 | 110-400 |
| Length of smoke stick | mm | 800 | 900 | 900 | 900 | 900/1000 | 900/1000 | 900/1000 | 1000 | 1000 | 1000 | 1000 |
| Dimensions / Width | mm | 1220 | 1395 | 1395 | 1395 | 1495 | 1495 | 1495 | 1495 | 1495 | 1495 | 1495 |
| Dimensions / Height | mm | 2170 | 2320 | 2320 | 2580 | 2525 | 2525 | 2790 | 2975 | 2975 | 3210 | 3240 |
| Dimensions / Depth | mm | 845 | 985 | 985 | 985 | 1045 | 1045 | 1045 | 1180 | 1180 | 1180 | 1180 |
| Minimum room height | mm | 2200 | 2360 | 2360 | 2630 | 2580 | 2580 | 2850 | 3030 | 3030 | 3300 | 3350 |
| Minimum door width | mm | 870 | 1020 | 1020 | 1040 | 1090 | 1090 | 1100 | 1210 | 1210 | 1220 | 1250 |
| Total elec. connecting load incl. smoke generator | kw | 16,05 | 23,3 | 23,3 | 5,3 | 26,3 | 26,3 | 5,3 | 33,0 | 33,0 | 6,0 | 3,0 |
| Nominal heat load (gas-/oil-fired) | kw | - | - | - | 24 | - | - | 26,7 | - | - | 32,6 | - |
| Steam for humidifying 0.2 bar | kg/h | - | - | 25 | - | - | 30 | - | - | 40 | - | 40 |
| Steam for heating 6 bar | kg/h | - | - | - | - | - | - | - | - | - | - | 50 |
| Fusing at 400V 3-N as per Euro-norm | A | 35 | 50 | 50 | 20 | 50 | 50 | 20 | 63 | 63 | 20 | 20 |

Subject to technical alterations - 5/2004

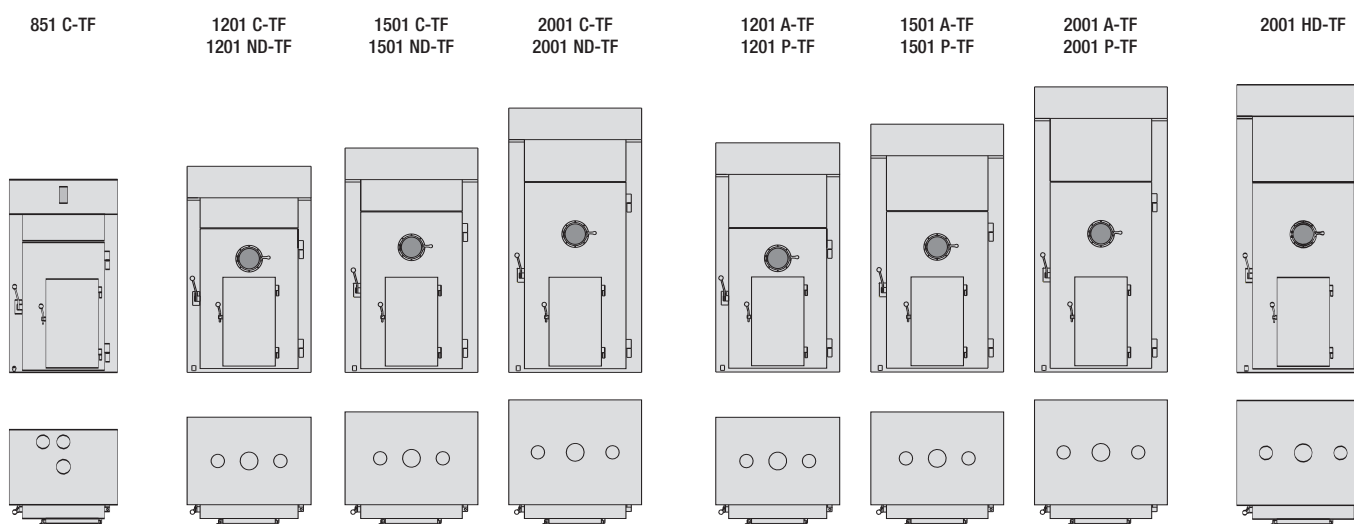

Key of heating types: Electric = C / Low-pressure steam = ND / Gas = A / Oil = P / High-pressure steam = HD



Bayha & Strackbein GmbH

P.O.Box 1260 · D-59702 Arnsberg · Germany
Kleinbahnstraße 12-16 · D-59759 Arnsberg-Hüsten

Phone +49 (0)2932 / 481-0
Fax +49 (0)2932 / 48139

Internet: www.bastra.de
E-Mail: info@bastra.de